

HIT photovoltaic module

HIP-210NKHB5 HIP-205NKHB5

The SANYO HIT (Heterojunction with Intrinsic Thin layer) solar cell is made of a thin mono crystalline silicon wafer surrounded by ultra-thin amorphous silicon layers. This product provides the industry's leading performance and value using state-of-the-art manufacturing techniques.




Benefit in Terms of Performance

The HIT cell and module have very high conversion efficiency in mass production.


Model	Cell Efficiency	Module Efficiency
HIP-210NKHB5	18.9%	16.4%
HIP-205NKHB5	18.4%	16.0%

High performance at high temperatures

Even at high temperatures, the HIT solar cell can maintain higher efficiency than a conventional crystalline silicon solar cell.

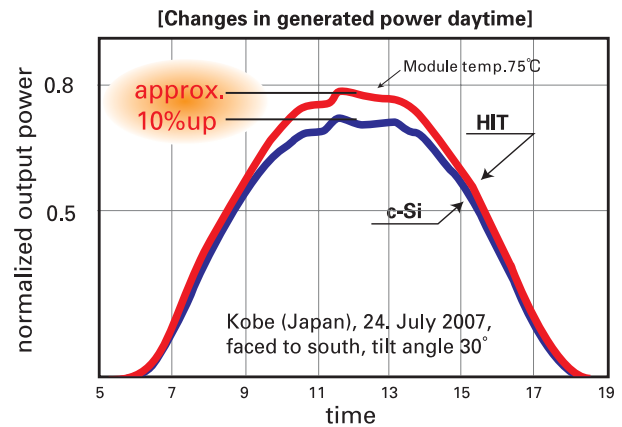

HIT Solar Cell Structure

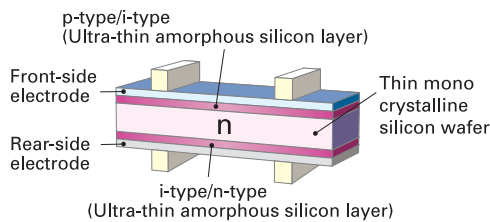

Development of HIT solar cell was supported in part by the New Energy and Industrial Technology Development Organization (NEDO).

Environmentally-Friendly Solar Cell More Clean Energy

HIT can generate more clean Energy than other conventional crystalline solar cells.


Special Features

SANYO HIT solar modules are 100% emission free, have no moving parts and produce no noise. The dimensions of the HIT modules allow space-saving installation and achievement of maximum output power possible on given roof area.


Models HIP-xxxNKHB5			
Electrical data		210	205
Maximum power (Pmax)	[W]	210	205
Max. power voltage (Vmp)	[V]	41.3	40.7
Max. power current (Imp)	[A]	5.09	5.05
Open circuit voltage (Voc)	[V]	50.9	50.3
Short circuit current (Isc)	[A]	5.57	5.54
Warranted minimum power (Pmin)	[W]	199.5	194.75
Maximum over current rating	[A]	15	
Output power tolerance	[%]	+10/-5	
Maximum system voltage	[V]	600	
Temperature coefficient of Pmax	[%/°C]	-0.30	
	Voc [V/°C]	-0.127	-0.126
	Isc [mA/°C]	1.67	1.66

Note 1: Standard Test Conditions: Air mass 1.5, Irradiance = 1000W/m², Cell temperature = 25°C
 Note 2: The values in the above table are nominal


Reference data for model HIP-210NKHB5

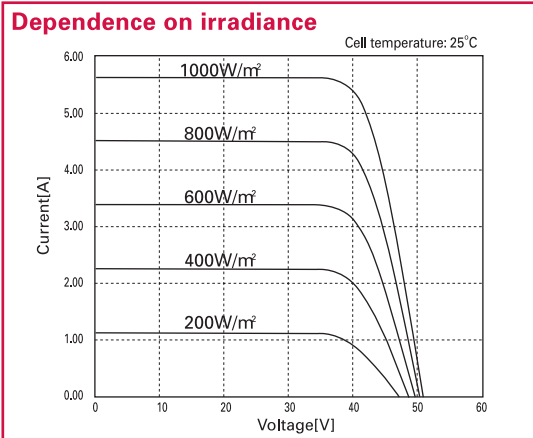

Reference data for model HIP-210NKHB5

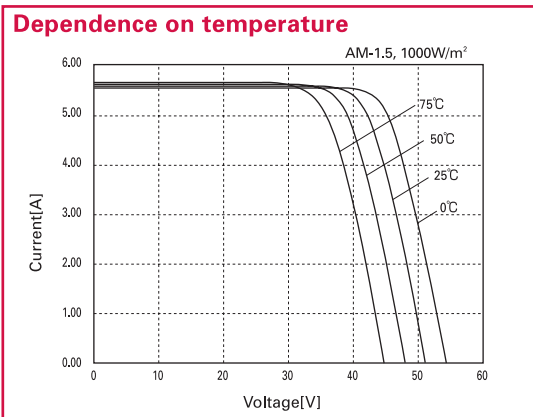

Dimensions and weight

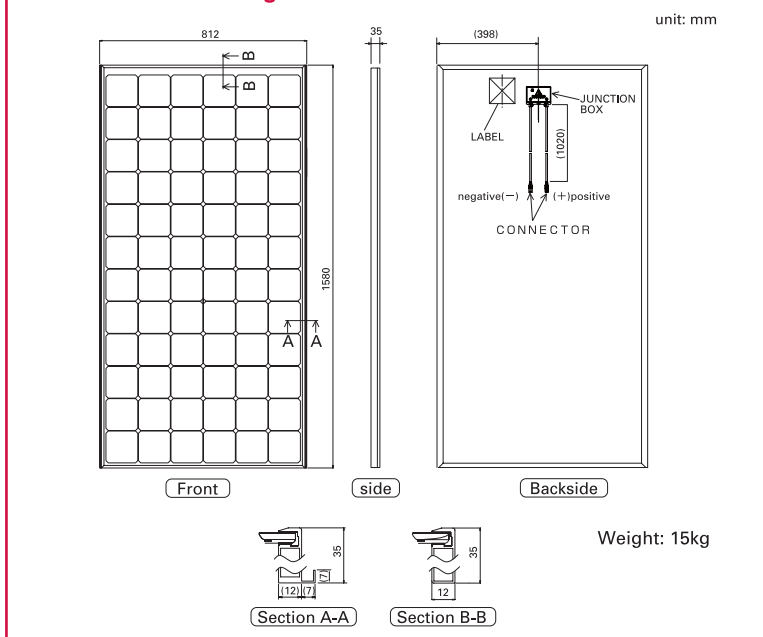

Certificates

Please consult your local dealer for more information.

Warranty

Power output: 20 years (80% of Pmin)
 Product workmanship: 5 years
 (Based on contract terms)

Certificate Number: PV05-53203-1012

An above number is a certification number by JET.
 JET: Japan Electrical Safety & Environment Technology Laboratories

CAUTION! Please read the operating instructions carefully before using the products.

Due to our policy of continual improvement the products covered by this brochure may be changed without notice.

[ASIA]
SANYO Electric Co., Ltd.
 International Sales & Marketing H.Q.
 Tel.81-6-6994-7359 Fax.81-6-6994-7083



SANYO Electric Co., Ltd.
 Solar Division

http://www.sanyo.com/solar
 email: homepage_solar@sanyo.com